


WPT  
WPT  
WPT  
WPT  
WPT  
WPT  
WPT  
WPT  
WPT  
WPT

# O型環規格表 AS-568A ORING

WPT

佳毅聯科技有限公司

# AS-568A ORING

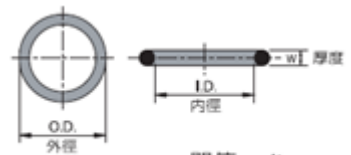


○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 001	0.74	2.78	1.02
AS 002	1.07	3.61	1.27
AS 003	1.42	4.48	1.53
AS 004	1.78	5.34	1.78
AS 005	2.57	6.13	1.78
AS 006	2.9	6.46	1.78
AS 007	3.69	7.25	1.78
AS 008	4.47	8.03	1.78
AS 009	5.29	8.85	1.78
AS 010	6.07	9.63	1.78
AS 011	7.65	11.21	1.78
AS 012	9.25	12.81	1.78
AS 013	10.82	14.38	1.78
AS 014	12.42	15.98	1.78
AS 015	14	17.56	1.78
AS 016	15.6	19.16	1.78
AS 017	17.17	20.73	1.78
AS 018	18.77	22.33	1.78
AS 019	20.35	23.91	1.78
AS 020	21.95	25.51	1.78
AS 021	23.52	27.08	1.78
AS 022	25.12	28.68	1.78
AS 023	26.7	30.26	1.78
AS 024	28.3	31.86	1.78
AS 025	29.87	33.43	1.78
AS 026	31.47	35.03	1.78
AS 027	33.05	36.61	1.78
AS 028	34.65	38.21	1.78
AS 029	37.82	41.38	1.78
AS 030	41	44.56	1.78
AS 031	44.17	47.73	1.78
AS 032	47.35	50.91	1.78
AS 033	50.52	54.08	1.78
AS 034	53.7	57.26	1.78
AS 035	56.87	60.43	1.78
AS 036	60.04	63.6	1.78
AS 037	63.22	66.78	1.78
AS 038	66.4	69.96	1.78
AS 039	69.57	73.13	1.78
AS 040	72.75	76.31	1.78

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 041	75.92	79.48	1.78
AS 042	82.27	85.83	1.78
AS 043	88.62	92.18	1.78
AS 044	94.97	98.53	1.78
AS 045	101.32	104.88	1.78
AS 046	107.62	111.18	1.78
AS 047	114.02	117.58	1.78
AS 048	120.37	123.93	1.78
AS 049	126.72	130.28	1.78
AS 050	133.07	136.63	1.78
AS 102	1.24	6.48	2.62
AS 103	2.05	7.29	2.62
AS 104	2.84	8.08	2.62
AS 105	3.63	8.87	2.62
AS 106	4.42	9.66	2.62
AS 107	5.23	10.47	2.62
AS 108	6.02	11.26	2.62
AS 109	7.6	12.84	2.62
AS 110	9.19	14.43	2.62
AS 111	10.77	16.01	2.62
AS 112	12.37	17.61	2.62
AS 113	13.95	19.19	2.62
AS 114	15.54	20.78	2.62
AS 115	17.12	22.36	2.62
AS 116	18.72	23.96	2.62
AS 117	20.29	25.53	2.62
AS 118	21.9	27.14	2.62
AS 119	23.47	28.71	2.62
AS 120	25.07	30.31	2.62
AS 121	26.65	31.89	2.62
AS 122	28.25	33.49	2.62
AS 123	29.82	35.06	2.62
AS 124	31.42	36.66	2.62
AS 125	32.99	38.23	2.62
AS 126	34.6	39.84	2.62
AS 127	36.17	41.41	2.62
AS 128	37.77	43.01	2.62
AS 129	39.35	44.59	2.62
AS 130	40.95	46.19	2.62
AS 131	42.52	47.76	2.62



# AS-568A ORING




單位 unit: mm

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 132	44.12	49.36	2.62
AS 133	45.7	50.94	2.62
AS 134	47.3	52.54	2.62
AS 135	48.9	54.14	2.62
AS 136	50.47	55.71	2.62
AS 137	52.07	57.31	2.62
AS 138	53.65	58.89	2.62
AS 139	55.25	60.49	2.62
AS 140	56.82	62.06	2.62
AS 141	58.42	63.66	2.62
AS 142	60	65.24	2.62
AS 143	61.6	66.84	2.62
AS 144	63.17	68.41	2.62
AS 145	64.77	70.01	2.62
AS 146	66.35	71.59	2.62
AS 147	67.95	73.19	2.62
AS 148	69.52	74.76	2.62
AS 149	71.12	76.36	2.62
AS 150	72.7	77.94	2.62
AS 151	75.87	81.11	2.62
AS 152	82.22	87.46	2.62
AS 153	88.57	93.81	2.62
AS 154	94.92	100.16	2.62
AS 155	101.27	106.51	2.62
AS 156	107.62	112.86	2.62
AS 157	113.97	119.21	2.62
AS 158	120.32	125.56	2.62
AS 159	126.67	131.91	2.62
AS 160	133.02	138.26	2.62
AS 161	139.37	144.61	2.62
AS 162	145.72	150.96	2.62
AS 163	152.07	157.31	2.62
AS 164	158.42	163.66	2.62
AS 165	164.77	170.01	2.62
AS 166	171.12	176.36	2.62
AS 167	177.47	182.71	2.62
AS 168	183.82	189.06	2.62
AS 169	190.17	195.41	2.62
AS 170	196.52	201.76	2.62
AS 171	202.87	208.11	2.62

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 172	209.22	214.46	2.62
AS 173	215.57	220.81	2.62
AS 174	221.92	227.16	2.62
AS 175	228.27	233.51	2.62
AS 176	234.62	239.86	2.62
AS 177	240.97	246.21	2.62
AS 178	247.32	252.56	2.62
AS 201	4.34	11.4	3.53
AS 202	5.94	13	3.53
AS 203	7.52	14.58	3.53
AS 204	9.12	16.18	3.53
AS 205	10.69	17.75	3.53
AS 206	12.29	19.35	3.53
AS 207	13.87	20.93	3.53
AS 208	15.47	22.53	3.53
AS 209	17.04	24.1	3.53
AS 210	18.64	25.7	3.53
AS 211	20.22	27.28	3.53
AS 212	21.82	28.88	3.53
AS 213	23.4	30.46	3.53
AS 214	25	32.06	3.53
AS 215	26.57	33.63	3.53
AS 216	28.17	35.23	3.53
AS 217	29.75	36.81	3.53
AS 218	31.34	38.4	3.53
AS 219	32.92	39.98	3.53
AS 220	34.52	41.58	3.53
AS 221	36.1	43.16	3.53
AS 222	37.7	44.76	3.53
AS 223	40.87	47.93	3.53
AS 224	44.05	51.11	3.53
AS 225	47.22	54.28	3.53
AS 226	50.4	57.46	3.53
AS 227	53.57	60.63	3.53
AS 228	56.75	63.81	3.53
AS 229	59.92	66.98	3.53
AS 230	63.1	70.16	3.53
AS 231	66.27	73.33	3.53
AS 232	69.44	76.5	3.53
AS 233	72.62	79.68	3.53



# AS-568A ORING

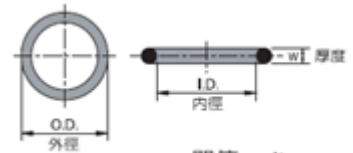


○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 234	75.79	82.85	3.53
AS 235	78.97	86.03	3.53
AS 236	82.14	89.2	3.53
AS 237	85.32	92.38	3.53
AS 238	88.49	95.55	3.53
AS 239	91.67	98.73	3.53
AS 240	94.84	101.9	3.53
AS 241	98.02	105.08	3.53
AS 242	101.19	108.25	3.53
AS 243	104.37	111.43	3.53
AS 244	107.54	114.60	3.53
AS 245	110.72	117.78	3.53
AS 246	113.89	120.95	3.53
AS 247	117.07	124.13	3.53
AS 248	120.24	127.3	3.53
AS 249	123.42	130.48	3.53
AS 250	126.59	133.65	3.53
AS 251	129.77	136.83	3.53
AS 252	132.94	140	3.53
AS 253	136.12	143.18	3.53
AS 254	139.3	146.36	3.53
AS 255	142.47	149.53	3.53
AS 256	145.65	152.71	3.53
AS 257	148.82	155.88	3.53
AS 258	152	159.06	3.53
AS 259	158.35	165.41	3.53
AS 260	164.7	171.76	3.53
AS 261	171.05	178.11	3.53
AS 262	177.4	184.46	3.53
AS 263	183.75	190.81	3.53
AS 264	190.1	197.16	3.53
AS 265	196.45	203.51	3.53
AS 266	202.8	209.86	3.53
AS 267	209.15	216.21	3.53
AS 268	215.5	222.56	3.53
AS 269	221.85	228.91	3.53
AS 270	228.2	235.26	3.53
AS 271	234.55	241.61	3.53
AS 272	240.9	247.96	3.53
AS 273	247.25	254.31	3.53

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 274	253.6	260.66	3.53
AS 275	266.3	273.36	3.53
AS 276	279	286.06	3.53
AS 277	291.7	298.76	3.53
AS 278	304.4	311.46	3.53
AS 279	329.8	336.86	3.53
AS 280	355.2	362.26	3.53
AS 281	380.6	387.66	3.53
AS 282	405.26	412.32	3.53
AS 283	430.66	437.72	3.53
AS 284	456.06	463.12	3.53
AS 309	10.46	21.12	5.33
AS 310	12.07	22.73	5.33
AS 311	13.64	24.3	5.33
AS 312	15.24	25.9	5.33
AS 313	16.81	27.47	5.33
AS 314	18.42	29.08	5.33
AS 315	19.99	30.65	5.33
AS 316	21.59	32.25	5.33
AS 317	23.16	33.82	5.33
AS 318	24.77	35.43	5.33
AS 319	26.34	37	5.33
AS 320	27.94	38.6	5.33
AS 321	29.51	40.17	5.33
AS 322	31.12	41.78	5.33
AS 323	32.69	43.35	5.33
AS 324	34.29	44.95	5.33
AS 325	37.47	48.13	5.33
AS 326	40.65	51.31	5.33
AS 327	43.82	54.48	5.33
AS 328	46.99	57.65	5.33
AS 329	50.16	60.82	5.33
AS 330	53.34	64	5.33
AS 331	56.52	67.18	5.33
AS 332	59.69	70.35	5.33
AS 333	62.87	73.53	5.33
AS 334	66.04	76.7	5.33
AS 335	69.22	79.88	5.33
AS 336	72.39	83.05	5.33
AS 337	75.57	86.23	5.33



# AS-568A ORING

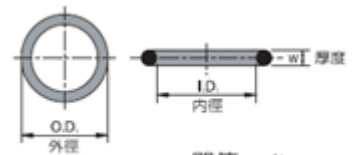


單位 unit: mm

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 338	78.74	89.4	5.33
AS 339	81.92	92.58	5.33
AS 340	85.09	95.75	5.33
AS 341	88.27	98.93	5.33
AS 342	91.44	102.1	5.33
AS 343	94.62	105.28	5.33
AS 344	97.79	108.45	5.33
AS 345	100.96	111.62	5.33
AS 346	104.14	114.8	5.33
AS 347	107.32	117.98	5.33
AS 348	110.49	121.15	5.33
AS 349	113.67	124.33	5.33
AS 350	116.84	127.5	5.33
AS 351	120.02	130.68	5.33
AS 352	123.19	133.85	5.33
AS-353	126.37	137.03	5.33
AS 354	129.54	140.2	5.33
AS 355	132.72	143.38	5.33
AS 356	135.89	146.55	5.33
AS 357	139.07	149.73	5.33
AS 358	142.24	152.9	5.33
AS 359	145.42	156.08	5.33
AS 360	148.59	159.25	5.33
AS 361	151.77	162.43	5.33
AS 362	158.12	168.78	5.33
AS 363	164.47	175.13	5.33
AS 364	170.82	181.48	5.33
AS 365	177.17	187.83	5.33
AS 366	183.52	194.18	5.33
AS 367	189.87	200.53	5.33
AS 368	196.22	206.88	5.33
AS 369	202.57	213.23	5.33
AS 370	208.92	219.58	5.33
AS 371	215.27	225.93	5.33
AS 372	221.62	232.28	5.33
AS 373	227.97	238.63	5.33
AS 374	234.32	244.98	5.33
AS 375	240.67	251.33	5.33
AS 376	247.02	257.68	5.33
AS 377	253.37	264.03	5.33

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 378	266.07	276.73	5.33
AS 379	278.77	289.43	5.33
AS 380	291.47	302.13	5.33
AS 381	304.17	314.83	5.33
AS 382	329.55	340.21	5.33
AS 383	354.97	365.63	5.33
AS 384	380.37	391.03	5.33
AS 385	405.26	415.92	5.33
AS 386	430.65	441.31	5.33
AS 387	456.06	466.72	5.33
AS 388	481.46	492.12	5.33
AS 389	506.86	517.52	5.33
AS 390	532.26	542.92	5.33
AS 391	557.66	568.32	5.33
AS 392	582.65	593.31	5.33
AS 393	608.1	618.76	5.33
AS 394	633.5	644.16	5.33
AS 395	658.85	669.51	5.33
AS 425	113.67	127.65	6.99
AS 426	116.84	130.82	6.99
AS 427	120.02	134	6.99
AS 428	123.19	137.17	6.99
AS 429	126.37	140.35	6.99
AS 430	129.54	143.52	6.99
AS 431	132.72	146.7	6.99
AS 432	135.89	149.87	6.99
AS 433	139.07	153.05	6.99
AS 434	142.24	156.22	6.99
AS 435	145.42	159.4	6.99
AS 436	148.59	162.57	6.99
AS 437	151.77	165.75	6.99
AS 438	158.12	172.1	6.99
AS 439	164.47	178.45	6.99
AS 440	170.82	184.8	6.99
AS 441	177.17	191.15	6.99
AS 442	183.52	197.5	6.99
AS 443	189.87	203.85	6.99
AS 444	196.22	210.2	6.99
AS 445	202.57	216.55	6.99
AS 446	215.27	229.25	6.99



# AS-568A ORING

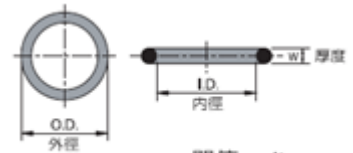

單位 unit: mm

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 447	227.97	241.95	6.99
AS 448	240.67	254.65	6.99
AS 449	253.37	267.35	6.99
AS 450	266.07	280.05	6.99
AS 451	278.77	292.75	6.99
AS 452	291.47	305.45	6.99
AS 453	304.17	318.15	6.99
AS 454	316.87	330.85	6.99
AS 455	329.57	343.55	6.99
AS 456	342.27	356.25	6.99
AS 457	354.97	368.95	6.99
AS 458	367.67	381.65	6.99
AS 459	380.37	394.35	6.99
AS 460	393.07	407.05	6.99
AS 461	405.26	419.24	6.99
AS 462	417.96	431.94	6.99
AS 463	430.66	444.64	6.99
AS 464	443.36	457.34	6.99
AS 465	456.06	470.04	6.99
AS 466	468.76	482.74	6.99
AS 467	481.46	495.44	6.99
AS 468	494.16	508.14	6.99
AS 469	506.86	520.84	6.99
AS 470	532.26	546.24	6.99
AS 471	557.66	571.64	6.99
AS 472	582.65	596.63	6.99
AS 473	608.1	622.08	6.99
AS 474	633.5	647.48	6.99
AS 475	658.85	672.83	6.99

○ 環 AS規格	內徑 I.D.	外徑 O.D.	厚度 W
AS 901	4.7	7.54	1.42
AS 902	6.07	9.33	1.63
AS 903	7.65	10.91	1.63
AS 904	8.92	12.58	1.83
AS 905	10.52	14.18	1.83
AS 906	11.89	15.85	1.98
AS 907	13.46	17.62	2.08
AS 908	16.36	20.78	2.21
AS 909	17.94	22.86	2.46
AS 910	19.18	24.1	2.46
AS 911	21.92	27.82	2.95
AS 912	23.47	29.37	2.95
AS 913	25.04	30.94	2.95
AS 914	26.6	32.5	2.95
AS 916	29.75	35.65	2.95
AS 918	34.42	40.32	2.95
AS 920	37.46	43.46	3
AS 924	43.68	49.68	3
AS 928	53.09	59.09	3
AS 932	59.36	65.36	3

